

Important Information

HSM V-Press 860 TimeSave

Vertical baling press

Model: HSM V-Press 860 TimeSave

Double door with hand wheel door lock and automatic lifting/tilting device
incl. operating manual / declaration of conformity

- Convenient and particularly fast loading via hydraulic lifting/tilting device
- Rapid stroke technology saves time and money
- Special retaining claws optimize the compression of the pressing material and reduce the number of loading actions
- Comfortable easy-to-use membrane keypad with text display which shows the current status of the machine
- High process reliability due to HSM TCS (TorsionControlSystem)
- Basic equipment: 2 coils wire 2.45 x 3400 mm



☐ Operating side left hand




☐ Operating side right hand

Pressing power in kN	594
Motor in kW	4+3
Voltage / Frequency	3 x 400 V / 50 Hz
Loading aperture W x H in mm	1195 x 650
Bale weight in kg (depending on material)	up to 430
Bale size L x W x H in mm	1200 x 780 x max. 1200
Press chamber size W x D x H in mm	1225 x 780 x 1640
Dimensions of machine* W x D x H in mm	2202 x 3584 x 3004
Transport dimensions of machine W x D x H in mm	2200 x 2603 x 2280
Machine weight in kg	3680
Strapping	4-fold with quick-link wire


*External dimensions of the machine when set up for operation.

Dimensions and space requirement

HSM V-Press 860 TimeSave

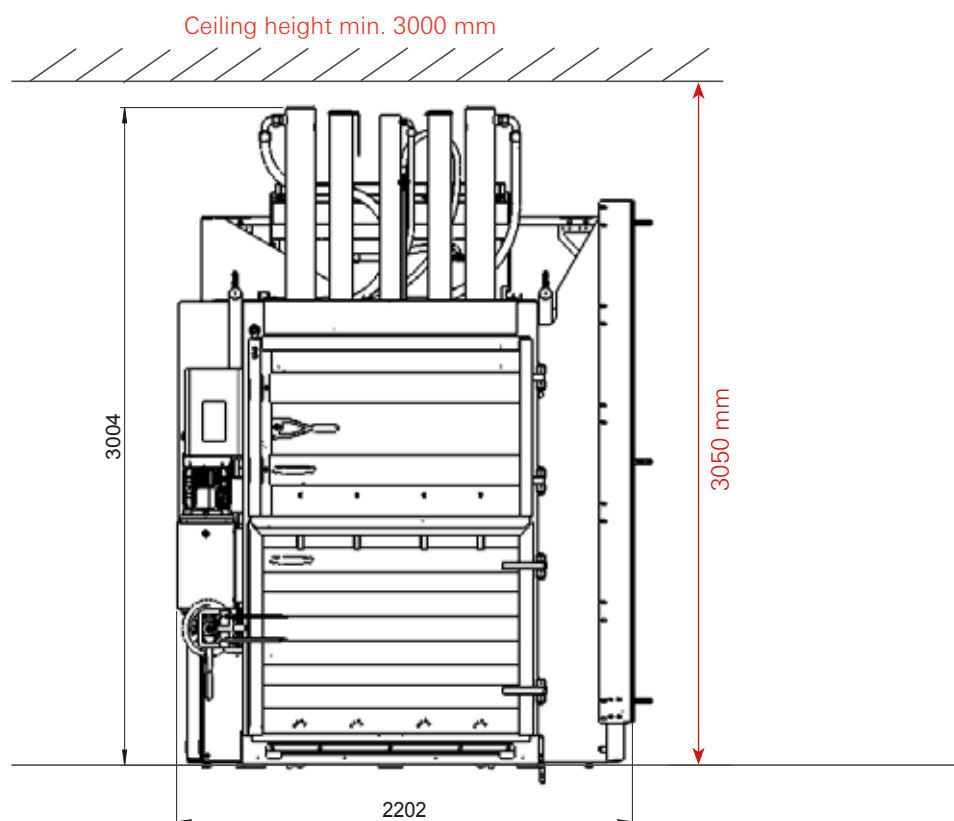

Please note the projections!

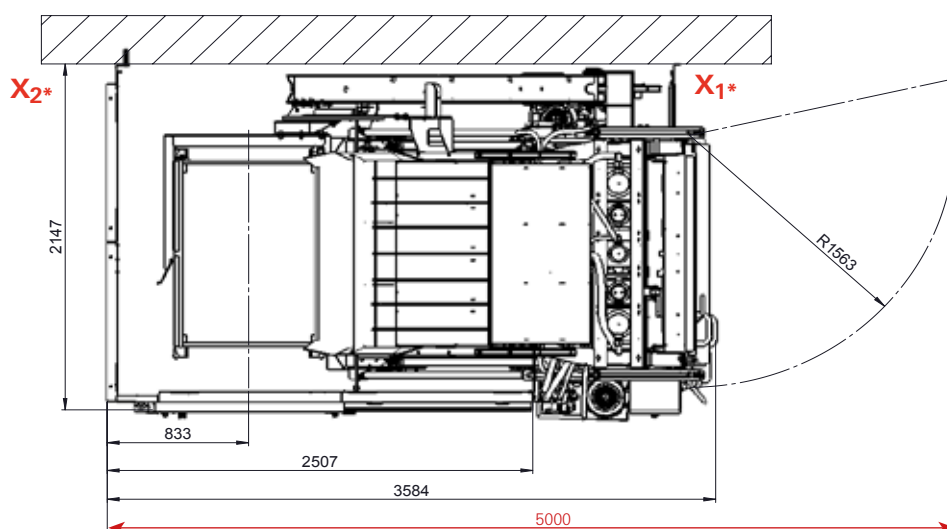

Required entire depth incl. swing
range of the pressing door: 5000 mm

Delivery and installation

HSM V-Press 860 TimeSave

Delivery by truck:

- Is the place of delivery easily to access?
If NO – why not? _____
☐ yes ☐ no
- Do you have to cross a pedestrian zone for the delivery? ☐ yes ☐ no
- Has the truck to go through a gate for the delivery?
(Dimensions of the gate: _____) ☐ yes ☐ no
- Is there a truck loading ramp? (Height: _____) ☐ yes ☐ no
- Is a truck with an liftgate needed? ☐ yes ☐ no
- Is there a forklift truck available? (Lifting power: _____) ☐ yes ☐ no
- Is there a need to deliver without a trailer? ☐ yes ☐ no
- Are there limited delivery hours? (_____) ☐ yes ☐ no

Movement to the place of installation:

Is there a stair / a higher ledge on the way to the place of installation?
(an at-grade insertion has to be ensured) ☐ yes ☐ no

Has the press to be transported with an elevator / a lift? ☐ yes ☐ no

If yes: Load capacity in kg: _____

Please indicate the dimensions of the smallest passage for introducing
the machine? ☐ yes ☐ no

Dimensions: width: _____ height: _____

Is the potential floor loading adequate for the machine?
(floor loading max. = 1480 kg per m², bale weight enclosed) ☐ yes ☐ no

If no: Is a load-distribution plate needed? ☐ yes ☐ no

Is there a ceiling height of in minimum 3.1 m? ☐ yes ☐ no

If no: Height: _____



Electrical connection

HSM V-Press 860 TimeSave

Rated power	4.0 +3.0 kW
Operating voltage U	400 V
Frequency	50 Hz
Rated current I _n	16 A
Battery backup	3 x 20 A (K-, C-, gL-characterise)
Connector plug	CEE 5 x 32 A
Length of power supply	From mark X₁ / X₂ free usable length (please see drawing page 1 + 2) X₁ = approx. 5000 mm X₂ = approx. 3000 mm



Is there an electrical connection with the mentioned values at the place of installation?

☐ yes ☐ no

Consumable materials

HSM V-Press 860 TimeSave



Quick-link wire

HSM order number: 6155 993 000
Ø x L = 2.45 x 3400 mm

Do you have any questions ?

Your HSM contact person is glad to help! Tel.: +49 7554 2100-200 Fax: -260

Contact person:

Telephone:

Delivery address:

Place / Date / Customer signature:
